
## INSUL-PIPE SYSTEMS STEEL CORE \* PVC CLAD \* SERVICE TEMP: +35 TO +250 F

PIPING SYSTEM:	Underground pre-insulated chilled and hot water supply and
	return piping system.
CARRIER PIPE:	STEEL – ASTM A-53 Grade B, ERW, SCH 40 thru 10",
	standard weight 12" and larger. Grooved ends for Victaulic
	fitting coupling connection.
OUTER JACKET:	Polyvinylchloride (PVC) white, low pressure rated, seamless,
	ASTM D-1784, Class 1, Type 1 for jacket sizes up to 16", and
	High Density Polyethylene (HDPE), seamless, low pressure
	rated for sizes 18" and larger. Able to withstand H-20
	Highway loading. Thickness as shown below.
INSULATION:	Polyurethane, 2.5 PCF density, 90 to 95% closed cell, poured
	in place, "K" = .14 per inch @ 75 degrees F. Thickness as
	shown below.
END SEALS:	Factory applied, waterproof mastic covering the urethane
	insulation at the end of each joint of pipe and bonded to the
	carrier pipe and the outer jacket.
JOINT COVERS:	Couplings are insulated by wrapping a PVC Victaulic cover
	around the coupling joint, then pouring polyurethane insulation
	into the annular space, cleaning off the excess and sealing with
	tape provided.
FITTINGS:	Fittings are insulated by wrapping a PVC fitting cover over the
	exposed fitting and injecting polyurethane foam insulation into
	the annular space, cleaning off the excess and sealing with tape
	provided.

	F	10 11000.			
	Insulation	Jacket	Jacket		Heat
Nominal	Thickness	O.D.	Thickness	Insulation	Transfer
Pipe Size	Inches	Inches	Inches	"R" Value	BTU/LF/FDT
2	1.00	4.50	0.060	7.14	0.0872
21/2	1.05	6.14	0.060	11.07	0.0680
3	1.25	6.14	0.060	8.55	0.1035
4	1.75	8.16	0.080	12.50	0.0943
5	1.22	8.16	0.100	8.71	0.1670
6	1.68	10.20	0.120	12.00	0.1446
8	1.69	12.24	0.140	12.07	0.1870
10	1.65	14.32	0.160	11.78	0.2388
12	1.47	16.00	0.200	10.50	0.2498
14	1.78	17.83	0.200	12.71	0.2884
16	1.77	19.80	0.200	12.64	0.3314
18	1.97	22.17	0.200	14.07	0.3349
20	1.86	24.00	0.250	13.28	0.3943

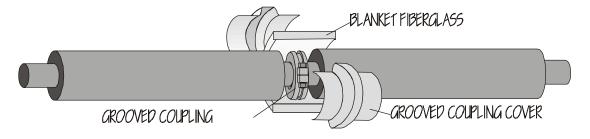

INSUL-PIPE SYSTEMS – AUSTIN, TEXAS – 800-869-7473

## INSUL-PIPE SYSTEMS STEEL CORE \* PVC CLAD \* SERVICE TEMP: +35 TO +250 F